






benne a fune per perforazioni

BST-7 / BMT

rope driven hammer grabs for drilling

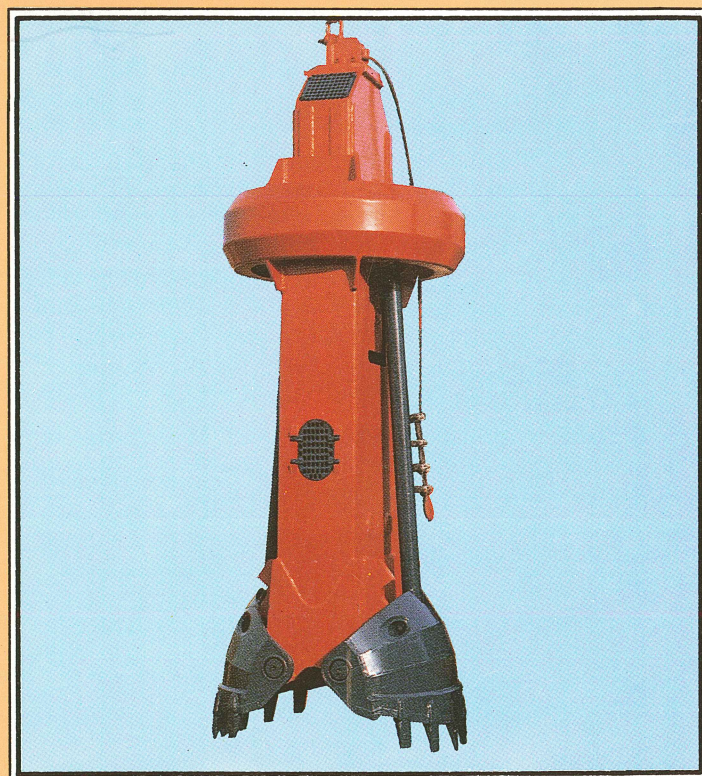

SOILMEC 

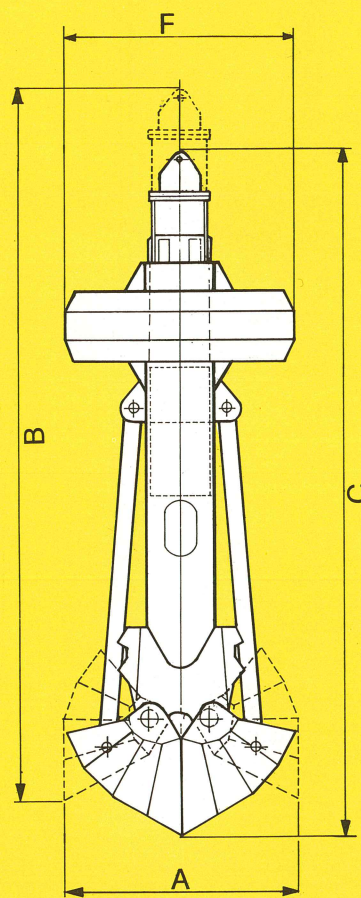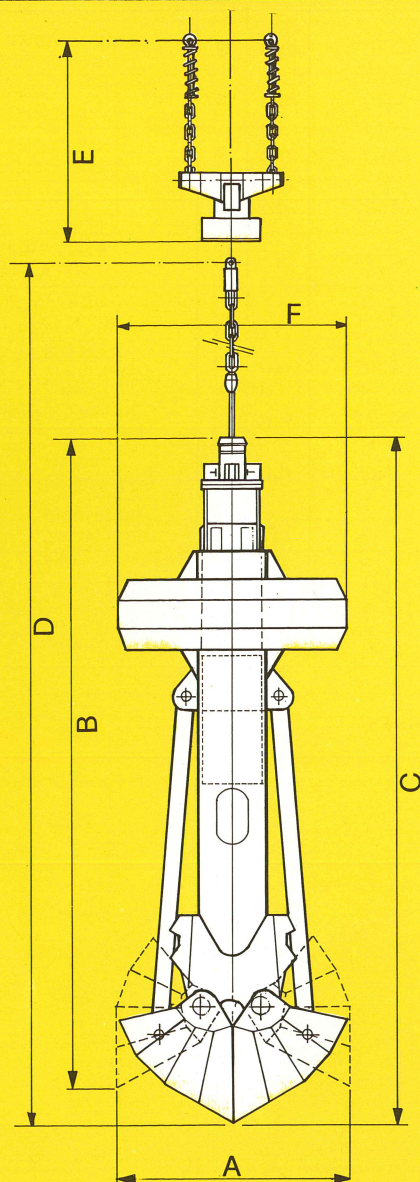

			BST-7		
Apertura valve Jaws opening	A	mm	1700	1900	2200
Larghezza valve Jaws width		mm	1680	1830	2100
Pali eseguibili Pile diameter	ø	mm	2000	2200	2500
Altezza valve aperte Height (open jaws)	B	mm	5234	5279	5323
Altezza valve chiuse Height (closed jaws)	C	mm	4997	5024	5050
Ingombro max. a valve chiuse Overall dimensions	D	mm	7003	7030	7056
Ingombro campana Catching-head dimensions	E	mm	1577	1577	1577
Diametro guida superiore Upper guide diameter	F	mm	1700	1700	1700
Capacità valve Capacity	I		900	1200	2000
Forza max. chiusura valve Max. locking force per jaw	t		17.5	20	24
Peso valve con Esco T 30 Jaws weight with Esco T 30	kg		2100	2320	2550
Lunghezza fune Rope length	Bifune Double rope	mm	20000	20000	21500
	Monofune Single rope	mm	15500	15500	17000
Peso benna Grab weight	Bifune Double rope	kg	7845	8065	8295
	Monofune Single rope	kg	7587	7807	8037
Diametro fune Rope diam.	ø	mm	26	26	26

