




Specification Sheet

PVE 150M

Standard Frequency Vibro Hammer

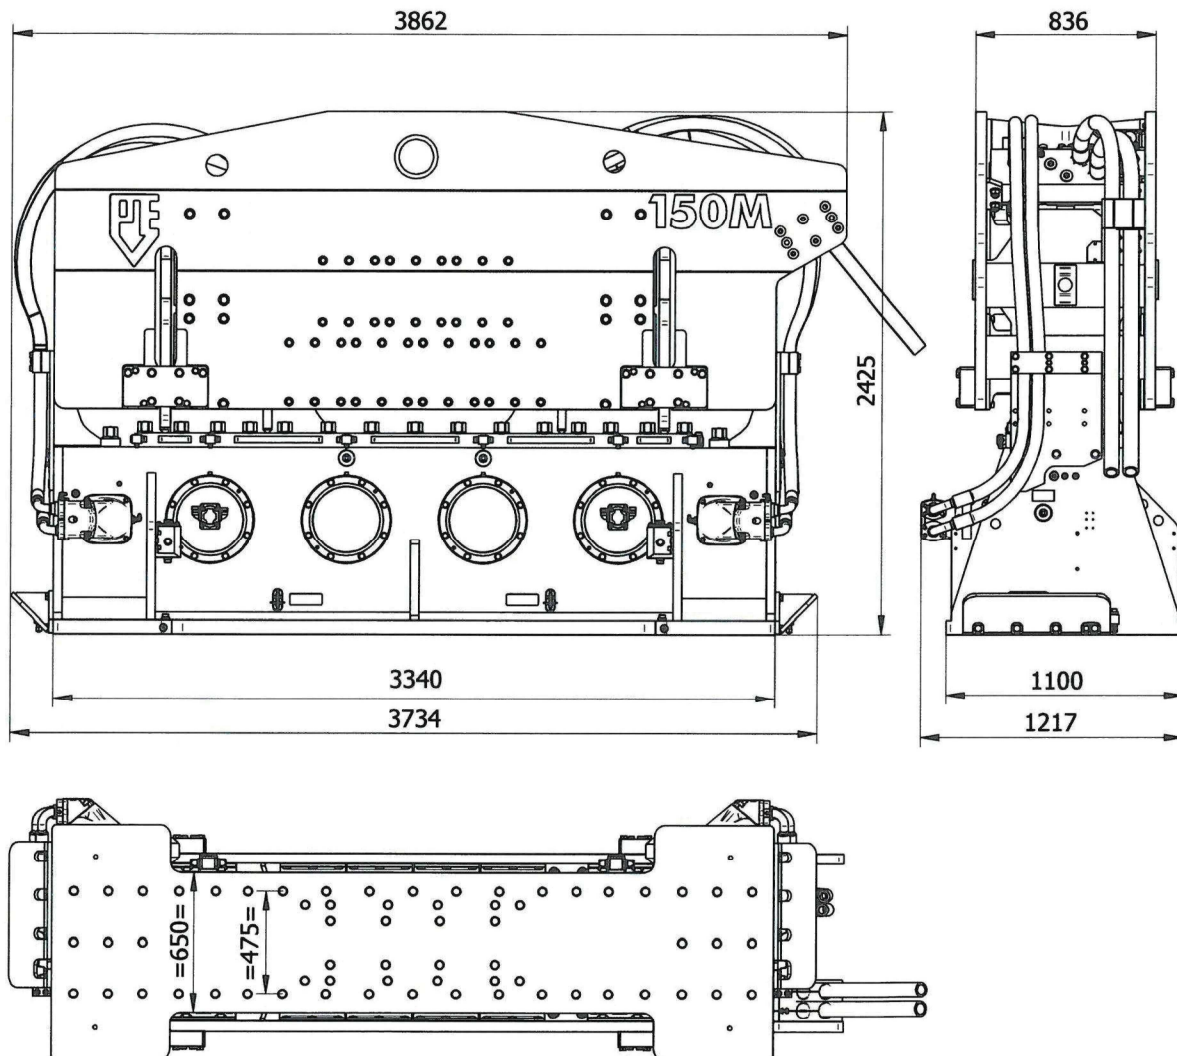

Specifications

150M




偏心モーメント	150	kgm	クランプ:	
最大起振力	3224	kN	ダブルクランプ	PPK 200TC (2x)
最大振動数	1400	rpm	輸送重量 1個当り	1350 kg
最大振幅 クランプを除く	28.5	mm		
最大振幅 クランプを含む	22.5	mm		
最大引張耐力	1260	kN		
最大作動圧	350	bar	電源装置:	
最大油流量	1293	l/min	モデル	1400
強制潤滑	有り			
動的質量 クランプを除く	10500	kg	ホース:	
動的質量 クランプを含む	13200	kg	長さ	45 m
全体質量 クランプとホースを除く	16980	kg	輸送重量(±)	1230 kg



Specification Sheet

PVE 1400 STAGE - / TIER 3

Hydraulic Power Unit

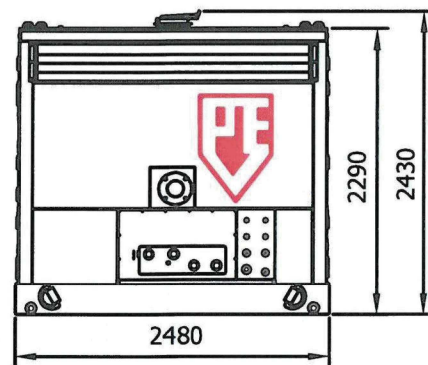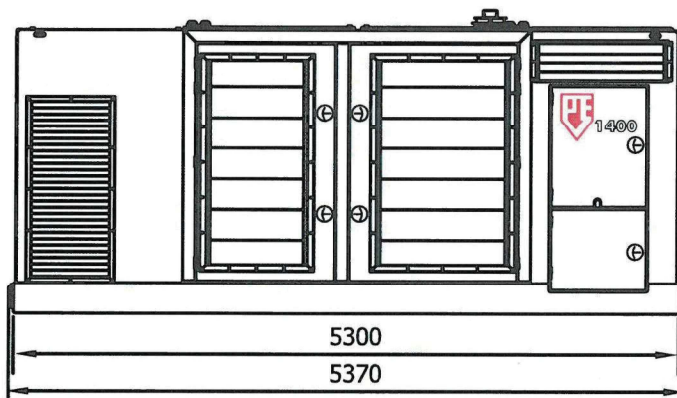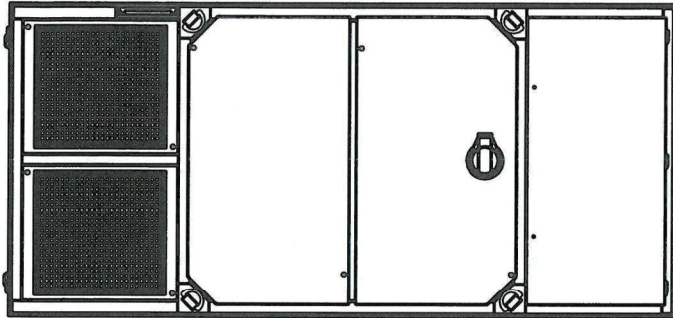

Specifications

1400

ディーゼルエンジン	Volvo TAD 1353 GE	2x
最大出力	898/1222	kW/HP (DIN)
最大振動数	1800	rpm
最大作動圧力	350	bar
油圧ポンプ	Rexroth	2x
最大油流量	1380	L/min
ディーゼルエンジンオイル	1820	L
油圧オイル	2130	L
輸送重量	13100	kg

PRODUCT RANGE CLAMPS




CLAMPS

PVE has developed a wide range of heavy duty clamping systems, beams and cross beams for driving piles. Our experts are on hand to offer advice on the best clamping solutions for your application.

- **DWK series:** sheets pile clamps for single or double sheets, H-beams, anchors
- **PPK series:** tube clamps for tubes or multiple sheets

SHEET PILE CLAMPS



DWK 200T



DWK 350T

締め付け力	kN	2000	3500
作動圧力	bar	300	320
重量	kg	2000	2600
長×幅×高	mm	1130 x 530 x 920	1242 x 540 x 940

TUBE CLAMPS



PPK 150T




PPK 175T



PPK 200TC





PPK 210TC




PPK 350T

締め付け力	kN	1500	175	2000	2000	3500
作動圧力	bar	300	300	320	320	320
重量	kg	1300	1300	1350	1600	2980
長×幅×高	mm	797 x 420 x 750	797 x 420 x 750	915 x 430 x 1092	975 x 430 x 1102	1228 x 600 x 925

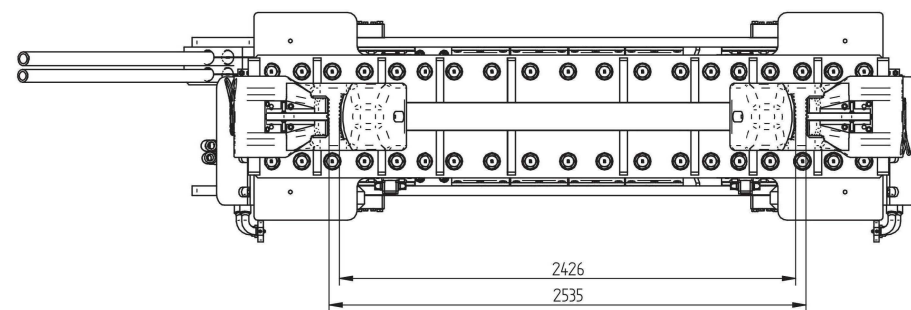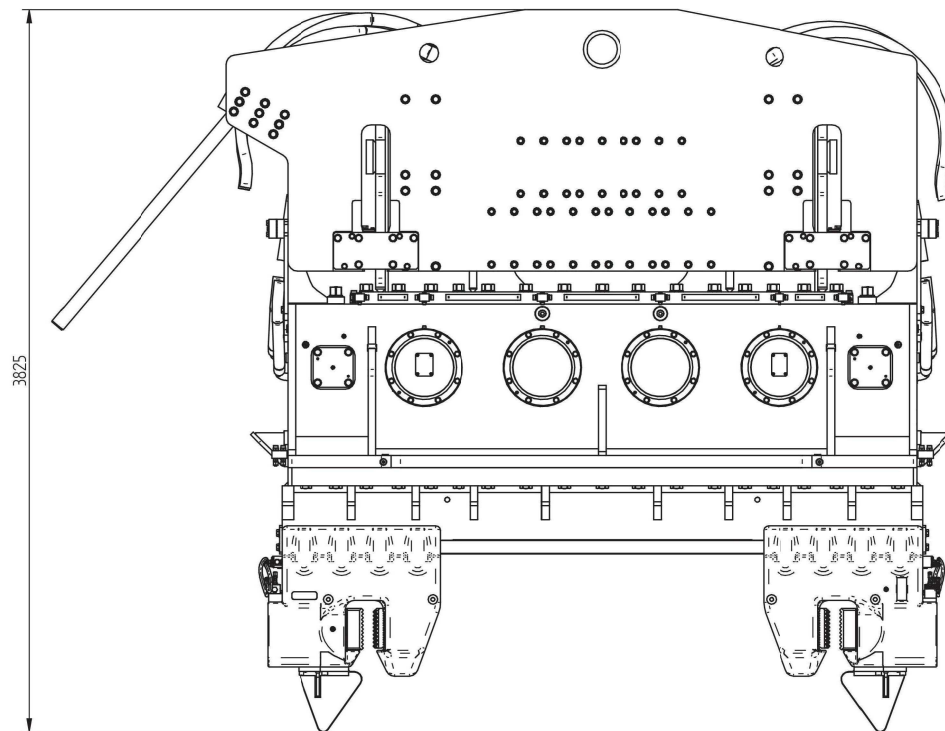

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

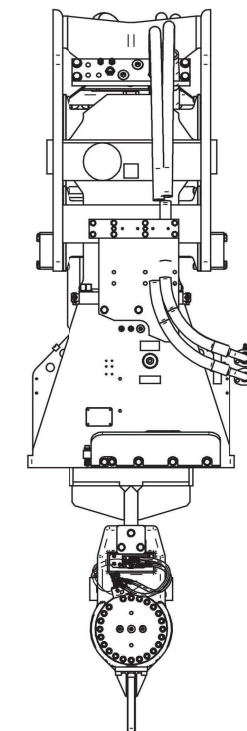

Title/descr: Samenstelling		Project: 130 / 170M																			
Scale:	Mat:	Tolerances acc. to ISO 2768	Proj. 																		
Units: mm	Mat. treatment:	<table><tr><td>±</td><td>0</td><td>6</td><td>30</td><td>120</td><td>400</td></tr><tr><td><</td><td>6</td><td>30</td><td>120</td><td>400</td><td>1000</td></tr><tr><td>Tol.</td><td>±0.1</td><td>±0.2</td><td>±0.3</td><td>±0.5</td><td>±0.8</td></tr></table>	±	0	6	30	120	400	<	6	30	120	400	1000	Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	Tol. acc. ISO 2768 Weld symacc. ISO 2553 Surface acc. ISO 1302
±		0	6	30	120	400															
<	6	30	120	400	1000																
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8																
Mass: 17035.4 kg																					
DIESEKO GROUP Diseeko Group BV Lelystraat 49, 3364M Sliedrecht, The Netherlands Tel: +31 (0)18446333 E-mail: info@diekogroup.com Fax: +31 (0)18441386 Website www.diekogroup.com		Name:	Date:	Size: A2	Sheet: 1 of 1	Revision:															
		Drawn: girtc	16-6-2016	Drawing No: 01093-160101																	
		Check:																			